

## FEATURES

- ✧ High current capability, low forward voltage
- ✧ Excellent high temperature stability
- ✧ Low power loss, and high efficiency
- ✧ High forward surge capability
- ✧ RoHS compliant, and Halogen free

## MACHANICAL DATA

- ✧ Case: TO-277B small outline plastic package
- ✧ Terminal: Matte tin plated, solderable per MIL-STD-750, Method 2026
- ✧ Molding Compound Flammability Rating:UL94-0
- ✧ High temperature soldering guaranteed:  
260°C /10second
- ✧ Packed with FRP substrate and epoxy underfilled

## ORDERING INFORMATION

- ✧ Device: GSD10M45SL
- ✧ Package: TO-277B
- ✧ Marking: 10M45
- ✧ Material: Halogen free
- ✧ Packing: Tape & 13" Reel
- ✧ Quantity per reel: 5,000pcs

## APPLICATIONS

- ✧ Switching mode power supply applications
- ✧ Portable equipment battery applications
- ✧ High frequency rectification
- ✧ DC/DC converter
- ✧ Designed as bypass diodes for solar panels

## PIN CONFIGURATION



## PACKAGE OUTLINE



### ABSOLUTE MAXIMUM RATING (Tamb=25°C, unless otherwise specified)

Symbol	Parameter	Value	Units
$V_{RRM}$	Repetitive Peak Reverse Voltage	45	V
$I_{F(AV)}$	Average Forward Current	10	A
$I_{FSM}$	Peak Forward Surge Current, 8.3ms single half sine-wave	120	A
$T_J$ & $T_{STG}$	Junction and Storage Temperature	-50~+150	°C

### ELECTRICAL CHARACTERISTICS (Tamb=25°C, unless otherwise specified)

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
$V_F$	Forward Voltage	$I_F = 2A @ 25^\circ C$		0.36	0.39	V
		$I_F = 10A @ 25^\circ C$		0.52	0.56	V
		$I_F = 2A @ 125^\circ C$		0.27		V
		$I_F = 10A @ 125^\circ C$		0.52		V
$V_R$	Reverse Breakdown Voltage	$I_R = 0.5mA$	45			V
$I_R$	Reverse Leakage Current	$V_R = 45V @ 25^\circ C$			120	$\mu A$
		$V_R = 45V @ 125^\circ C$		18		mA
$C_J$	Junction Capacitance	f=1MHz, $V_R=4V$		330		pF

### ELECTRICAL CHARACTERISTICS CURVE

Fig 1 Typical Forward Current Derating Curve

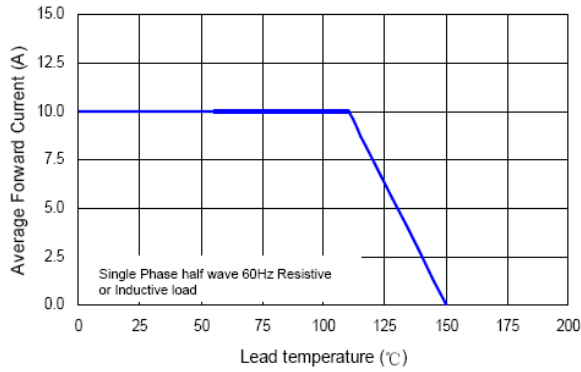


Fig 2 Typical Instantaneous Forward Characteristics

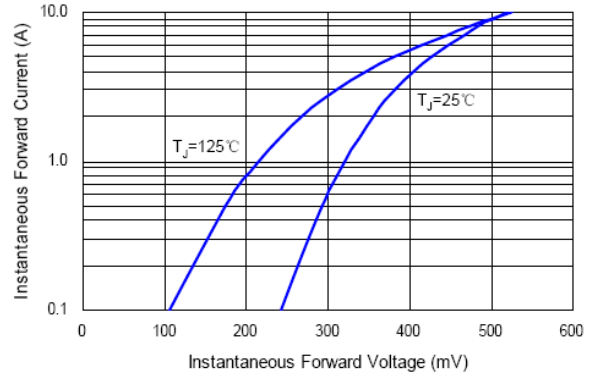


Fig 3 Max. Non-repetitive Forward Surge Current

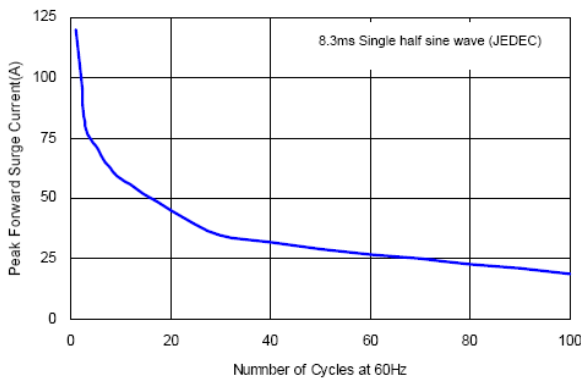


Fig 4 Typical Reverse Characteristics



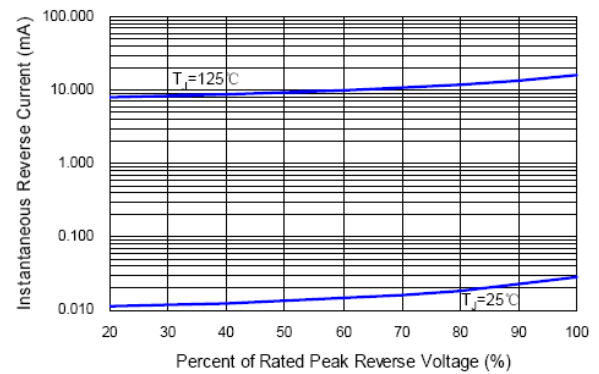


Fig 5 Total Capacitance vs. Reverse Voltage

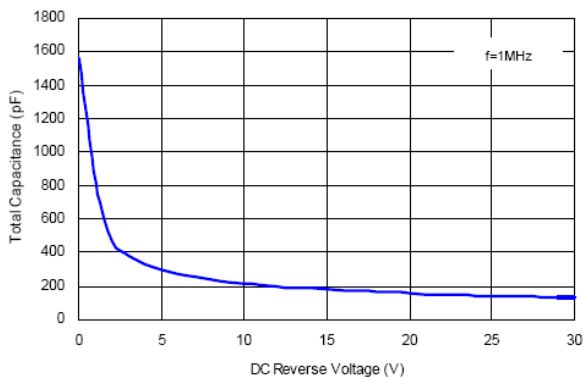


## TO-277B PACKAGE OUTLINE DIMENSIONS

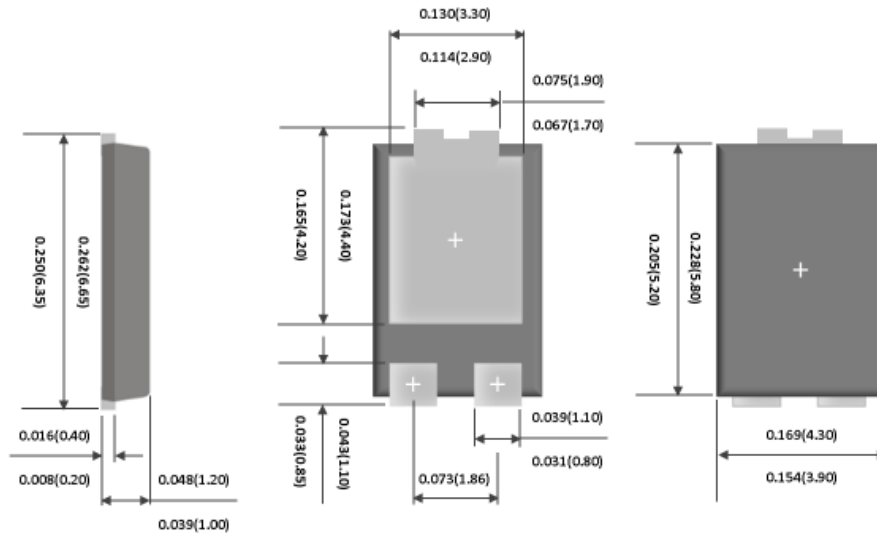

unit: mm

## FOOT PRINT RECOMMENDATION

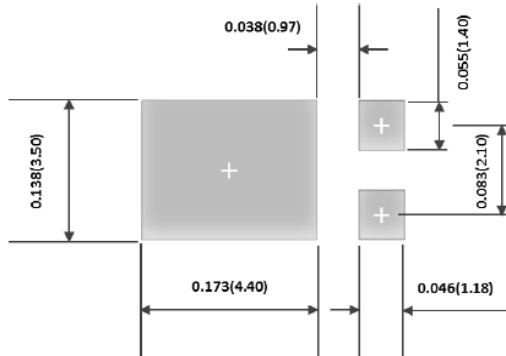

unit: mm

## MARKING CODE



10M45	YYYY	XXX
Device name	Trace code	Date code
		XXX
		XX=month(01,02,03,04,...11,12)
		X=year(4=2014,5=2015,6=2016...)