

**SURFACE MOUNT ULTRAFAST RECOVERY RECTIFIER**
**SURFACE MOUNT ULTRAFAST RECOVERY RECTIFIER**
**Reverse Voltage - 50 to 1000 V**
**Forward Current - 2 A**
**FEATURES**

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- High efficiency
- Lead free in comply with EU RoHS 2011/65/EU directives

**MECHANICAL DATA**

- Case: SMAF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 27mg 0.00086oz

**PINNING**

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View  
 Marking Code: US2A~US2M  
 Simplified outline SMAF and symbol

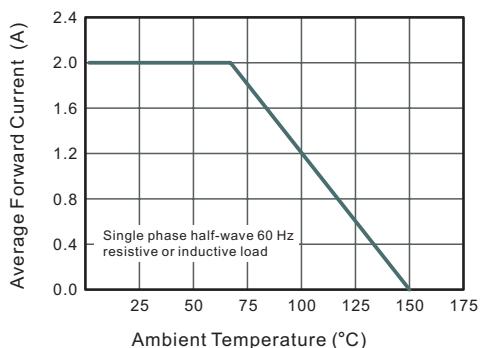
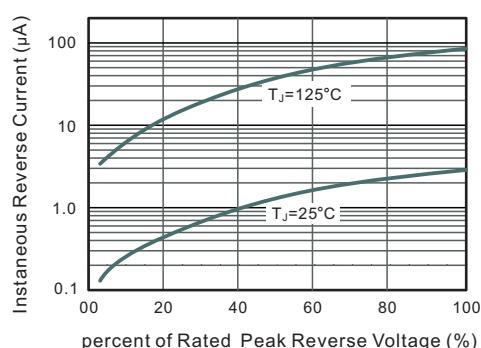
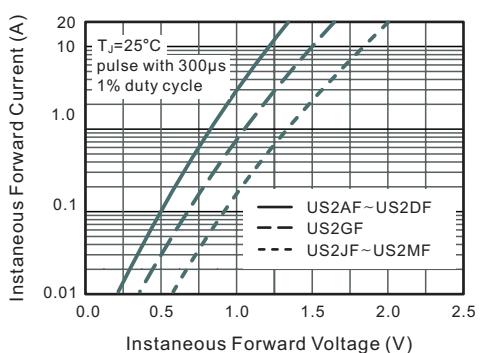
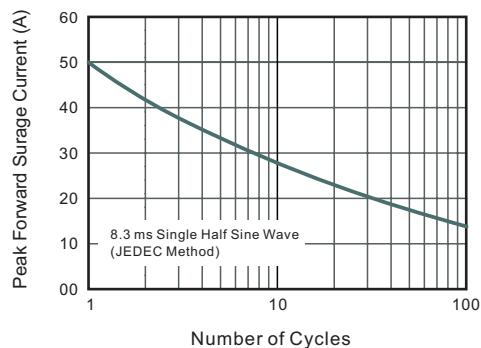
**Maximum Ratings and Electrical characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

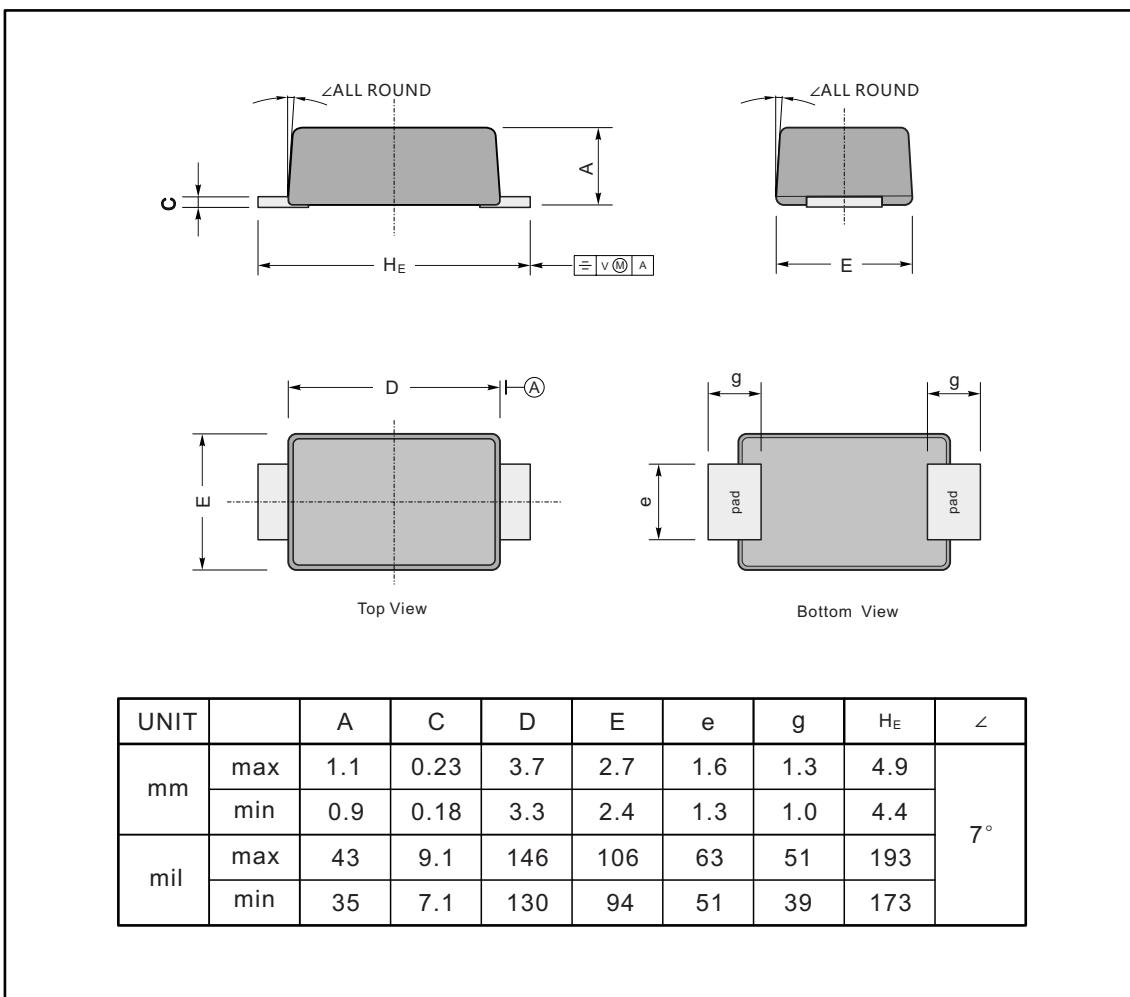
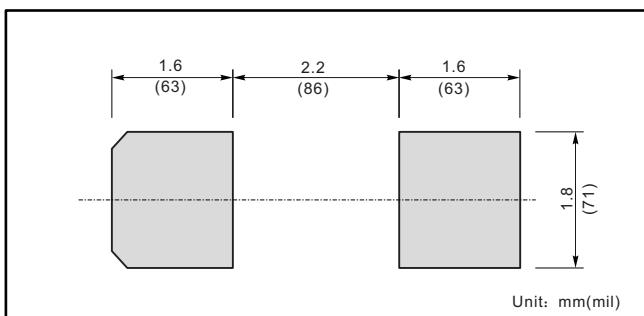
Parameter	Symbols	US2AF	US2BF	US2DF	US2GF	US2JF	US2KF	US2MF	Units					
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V					
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V					
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V					
Maximum Average Forward Rectified Current at $T_a = 65$ °C	$I_{F(AV)}$	2.0							A					
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	50							A					
Maximum Instantaneous Forward Voltage at 2 A	$V_F$	1.0		1.4		1.7		V						
Maximum DC Reverse Current $T_a = 25$ °C at Rated DC Blocking Voltage $T_a = 125$ °C	$I_R$	5 100							µA					
Maximum Reverse Recovery Time <sup>1)</sup>	$t_{rr}$	50			75			ns						
Typical Thermal Resistance	$R_{\theta JA}$	50							°C/W					
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150							°C					

 1) Measured with  $I_F = 0.5$  A,  $I_R = 1$  A,  $I_{rr} = 0.25$  A

**Fig.1 Forward Current Derating Curve**

**Fig.2 Typical Reverse Characteristics**

**Fig.3 Typical Instantaneous Forward Characteristics**

**Fig.4 Maximum Non-Repetitive Peak Forward Surge Current**


**PACKAGE OUTLINE**

Plastic surface mounted package; 2 leads

**SMAF**

**The recommended mounting pad size**
**Marking**


Type number	Marking code
US2AF	US2A
US2BF	US2B
US2DF	US2D
US2GF	US2G
US2JF	US2J
US2KF	US2K
US2MF	US2M