

Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 20 to 200 V

Forward Current - 3.0A

Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

MECHANICAL DATA

- Case: SMAF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 27mg / 0.00095oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View
 Marking Code: SS32 — SS320
 Simplified outline SMAF and symbol

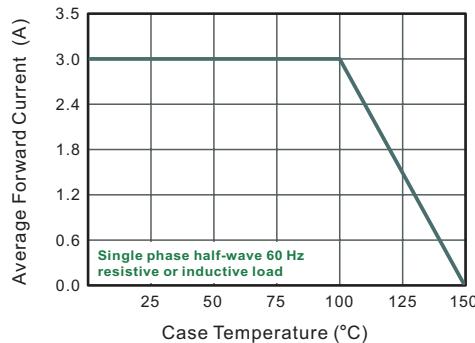
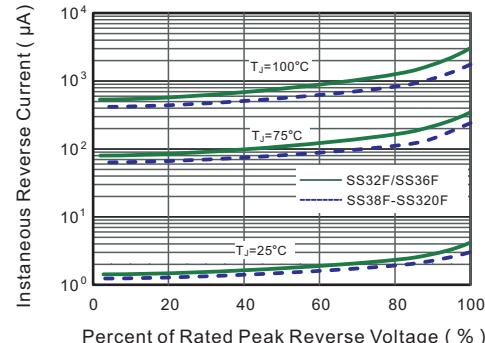
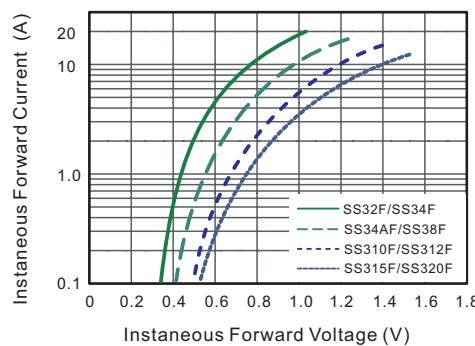
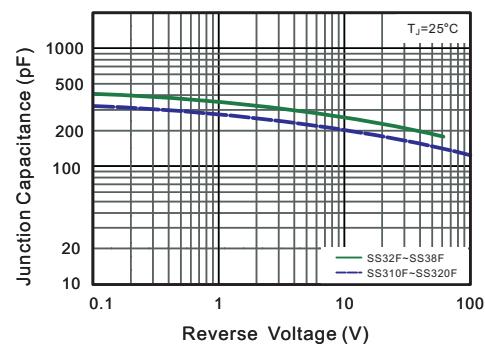
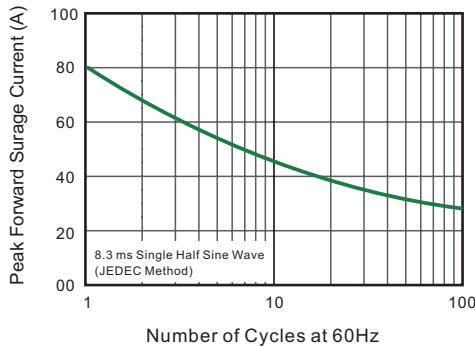
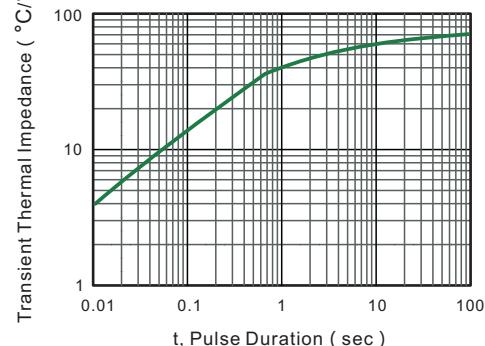
Absolute Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

Parameter	Symbols	SS32F	SS34F	SS34AF	SS36F	SS38F	SS310F	SS312F	SS315F	SS320F	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	40	45	60	80	100	120	150	200	V
Maximum RMS voltage	V _{RMS}	14	28	31.5	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V _{DC}	20	40	45	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	I _{F(AV)}	3.0									A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	80									A
Max Instantaneous Forward Voltage at 3 A	V _F	0.55		0.70		0.85		0.95			V
Maximum DC Reverse Current T _a = 25°C at Rated DC Reverse Voltage T _a = 100°C	I _R	0.5		5		0.3		3			mA
Typical Junction Capacitance ⁽¹⁾	C _j	250			180						pF
Typical Thermal Resistance ⁽²⁾	R _{θJA} R _{θJC}		70		18						°C/W
Operating Junction Temperature Range	T _j	-55 ~ +150									°C
Storage Temperature Range	T _{stg}	-55 ~ +150									°C

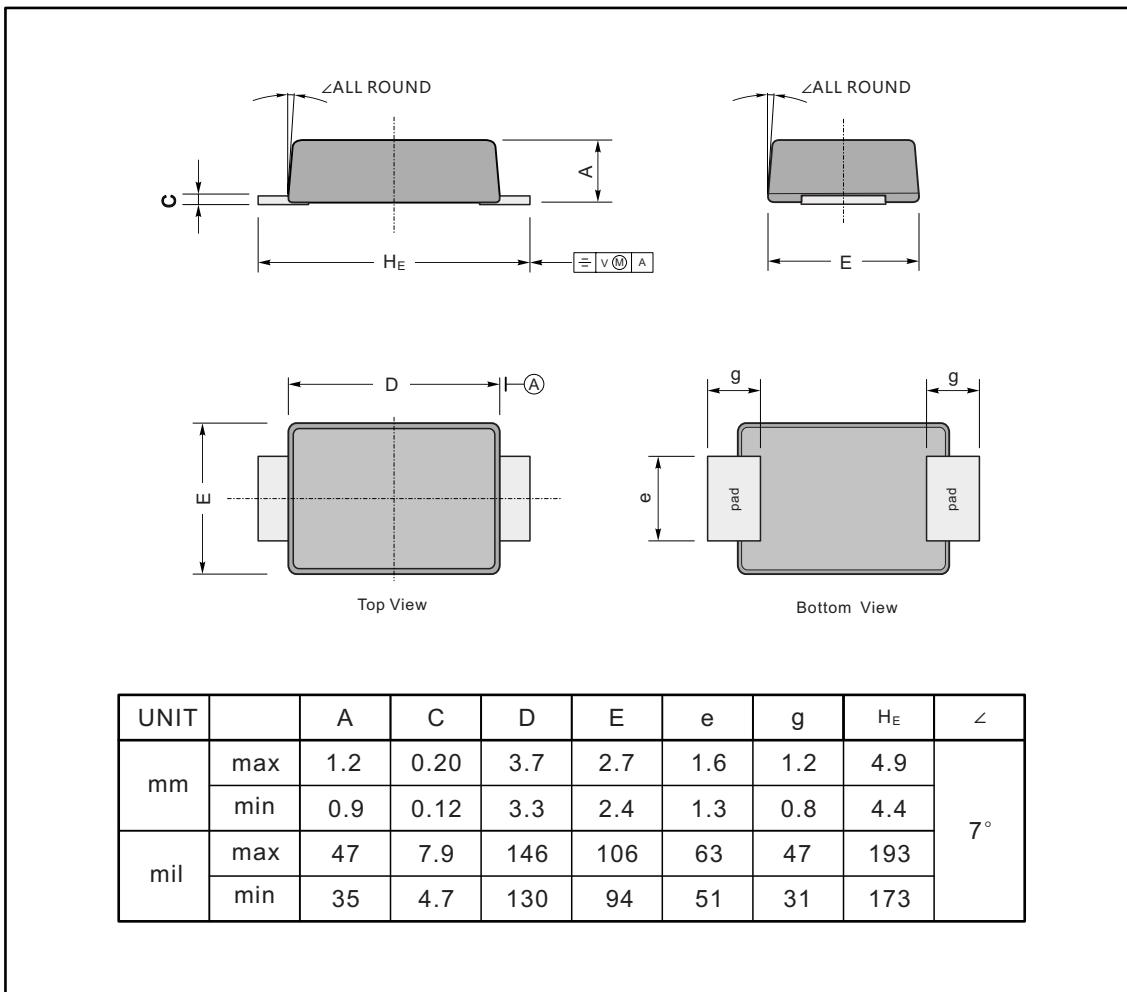
(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

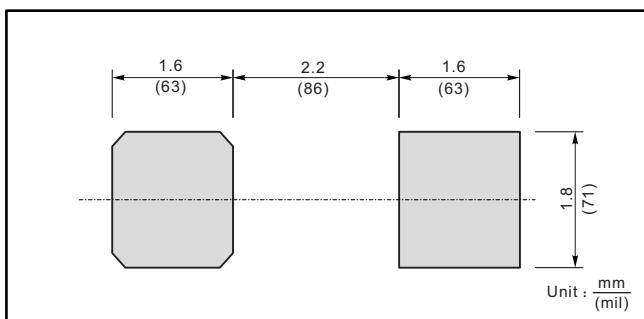
Fig.1 Forward Current Derating Curve

Fig.2 Typical Reverse Characteristics

Fig.3 Typical Forward Characteristic

Fig.4 Typical Junction Capacitance

Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

Fig.5- Typical Transient Thermal Impedance


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SMAF


The recommended mounting pad size



Marking

Type number	Marking code
SS32F	SS32
SS34F	SS34
SS34AF	SS34A
SS36F	SS36
SS38F	SS38
SS310F	SS310
SS312F	SS312
SS315F	SS315
SS320F	SS320